

4MP 32x Starlight IR WizSense Network PTZ Camera



System Overview

Featuring powerful optical zoom and accurate pan/tilt/zoom performance, this camera provides an all-in-one solution for capturing long distance video surveillance for outdoor applications. Together with infrared illumination and Starlight Technology, the camera is the perfect solution for dark, lowlight applications. The series combines a day/night mechanical IR cut filter for the highest image quality in variable lighting conditions during the day, and True WDR for applications with direct sunlight or glare.

Functions

Perimeter Protection

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, etc. Enables system to act secondary recognition for the targets to improve alarm accuracy.

Starlight+ Technology

For challenging low-light applications, TD's Starlight Ultra-low Light Technology offers best-in-class light sensitivity, capturing color details in low light down to 0.005 lux. The camera uses a set of optical features to balance light throughout the scene, resulting in clear images in dark environments.

PFA Technology

PFA technology has innovatively introduced new methods of judgment to ensure the accuracy and predictability of the direction of subject distance adjustment. The result is a set of advanced focusing algorithms. PFA ensures clarity of the image throughout the process of zooming and shortens focus time. The realization of PFA technology substantially improves user experience and increases product value.

- · 1/2.8" 4Megapixel STARVIS™ CMOS
- · Powerful 32x optical zoom
- · Max. 25/30 fps@4M
- · IR distance up to 492 ft
- · Deep-learning-based auto tracking and perimeter protection
- · SMD PLUS
- · PoE+
- · IP67, IK10
- · Face Detection













SMD PLUS

With Deep-Learning Algorithm, Toughdog SMD PLUS filters the motion detection alarm triggered by non-concerned target and recognizes human and vehicle effectively, sending alarms when human and vehicles intrude.

Wide Dynamic Range

The camera achieves vivid images, even in the most intense contrast lighting conditions, using industry-leading wide dynamic range (WDR) technology. For applications with both bright and low lighting conditions that change quickly, True WDR (120 dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Auto-tracking

This feature controls the pan/tilt/zoom actions of the camera to automatically track an object in motion and to keep it in the scene. The tracking action can be triggered manually or automatically by defined rules. Once a rule is triggered, the camera can zoom in and track the defined target automatically.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

Tochnical Specification				IVS	Object Abandoned/Missing
Technical Specification Camera					Object Abandoned/Missing Support human, motor vehicle and non-motor vehicle
	1/2 CUSTA DVISTA CAGO			Smart Capture	image capture.
Image Sensor Pixel	1/2.8" STARVIS™ CMOS 4MP			Perimeter Protection	Tripwire and intrusion. Support alarm triggering by target types (human and vehicle). Support filtering false alarms caused by animals, rustling leaves, bright lights, etc.
Max. Resolution	2560 (H) × 1440 (V)			Face Detection	Support
ROM	4 GB			Auto Tracking	Support
RAM	1 GB			SMD PLUS	Support
Electronic Shutter Speed	1/1 s-1/30,000 s			Video	
Scanning System	Progressive			Compression	H.265; H.264B; H.264M; H.264H; MJPEG (Sub Stream);
Min. Illumination	Color: 0.005 Lux@F1.35 B/W: 0.0005 Lux@F1.35 0 Lux (IR on)			Streaming Capability	H.265+; H.264+ 3 streams
Illumination Distance	150 m (492.13 ft)			Resolution	4M (2560 × 1440); 3M (2048 × 1536); 1080P (1920 × 1080); 720P (1280 × 720); D1 (704 × 576/704 × 480); CIF (352 × 288/352 × 240)
Illuminator On/Off Control Illuminator Number	Zoom Prio/Manual/SmartIR			Frame Rate	Main stream: 4M/3M/1080p/1.3M/720p (1–25/30 fps) Sub stream 1: D1/CIF (1–25/30 fps)
Lens				Bit Rate Control	Sub stream 2: 720p (1–25/30 fps) Variable/Constant
Focal Length	4.9 mm-156 mm				H.264: 3 Kbps–20480 Kbps
Max. Aperture	F1.35-F4.4			Bit Rate	H.265: 3 Kbps-20480 Kbps
Field of View	H: 61.6°–2.1°; V: 35.1°–1.3°; D: 68.2°–2.5°			Day/Night	Auto (ICR)/Color/B/W
Optical Zoom	32x			BLC	Support
Focus Control	Auto/Semi-Auto/Manual			WDR	120 dB
Close Focus Distance				HLC	Support
Iris Control	1 m-1.5 m (3.28 ft-4.92 ft) Auto/Manual/Fixed			White Balance	Auto/Indoor/Outdoor/Tracking/Manual/Sodium lamp Natural light/Street lamp
ms control	Detect Obs	erve Recognize	ldentify	Gain Control	Auto/Manual
DORI Distance	3120 m 123	2 m 624 m	312 m	Noise Reduction	2D/3D
	(10236.22 ft) (4041			Motion Detection	Support
PTZ				Region of Interest (RoI)	Support
Pan/Tilt Range	Pan: 0°–360° endless Tilt: –15° to +90°, auto fli p 180			Image Stabilization	Electronic
Manual Control Speed	Pan: 0.1°/s-300°/s			Defog	Electronic
	Tilt: 0.1°/s-200°/s			Digital Zoom	16x
Preset Speed	Pan: 400°/s Tilt: 300°/s			Flip	180°
Presets	300			Privacy Masking	Up to 24 areas, and up to 8 areas in the same view
Tour	8 (up to 32 presets per tour)			S/N Ratio	≥ 55 dB
Pattern	5			Audio	
Scan	5			Compression	G.711a; G.711Mu; G.726; AAC; MPEG2-Layer2; G722.1; G729; G723
Power-off Memory	Support			Network	0123,0123
Idle Motion	Preset/Tour/Pattern/Scanning			Ethernet	RJ-45 (10/100Base-T)
Protocol	DH-SD Pelco-P/D (auto recognition)			2	IPv4; IPv6; HTTP; HTTPS; 802.1x; Qos; FTP; SMTP;
Artificial Intelligence				Protocol	UPnP; SNMPv1/v2c/v3 (MIB-2); DNS; DDNS; NTP; RTSP; RTP; TCP; UDP; IGMP; ICMP; DHCP; PPPoE; ARP; RTCP; RTMP
Event Trigger	Motion detection, video tampering, scene changing, Network disconnection, IP address conflict, illegal access, and storage anomaly.			Interoperability	ONVIF Profile S&G&T CGI

TUI TZ4MII JZINJI	Al				
Streaming Method	Unicast/Multicast				
User/Host	20 (total bandwidth 64M)				
Storage	FTP; Micro SD card (256G); NAS				
Browser	IE7 and later versions Chrome 42 and earlier versions Firefox 52 and earlier versions Safari				
Management Software	Smart PSS; DSS; DMSS; Easy4ip; IVSS				
Mobile Phone	IOS, Android				
Certification					
Certifications	CE: EN55032/EN55024/EN50130-4 FCC: Part15 subpartB, ANSI C63.4-2014 UL: UL60950-1+ CAN/CSA C22.2,No.60950-1				
Port					
Audio I/O	1 (Line in; bare wire)/1 (Line out; bare wire)				
Alarm I/O	2/1				
Power					
Power Supply	DC 24 V/2.5 A ± 25% PoE+ (802.3at)				
Power Consumption	Basic: 12 W Max: 20 W				
Environment					
Operating Temperature	-40°C to $+70^{\circ}\text{C}$ (-40°F to $+158^{\circ}\text{F}$)				
Operating Humidity	≤ 95%				
Protection	IP67; IK10; 6000V lightning proof; surge protection; voltage transient protection				
Structure					
Dimensions	Φ190 mm × 332 mm (Φ7.48" × 13.07")				
Net Weight	4.7 kg (10.36 lb)				
Gross Weight	8 kg (17.64 lb)				

Ordering Information					
Туре	Model	Description			
4MP WizSense PTZ Camera	TDPTZ4MP32IRST-AI	4MP 32x Starlight IR WizSense Network PTZ Camera			
Accessories	PFB305W	Wall Mount Bracket			
	DC 24 V/2.5 A	Power Adapter			
	PFA111	Mount Adapter			
	PFA140	Power Box			
	PFB300C	Ceiling Mount Bracket			
	PFA120	Junction Box			
	PFA150	Pole Mount Bracket			
	PFA151	Corner Mount Bracket			
	PFB303S	Parapet Mount Bracket			

Accessories

Included:







DC 24 V/2.5 A Power Adapter

Optional:



PFA111 Mount Adapter



PFA120 Junction Box



PFA 140 Power Box



PFA150 Pole Mount Bracket




PFB300C Ceiling Mount Bracket



PFA151 Corner Mount Bracket



PFB303S Parapet Mount Bracket

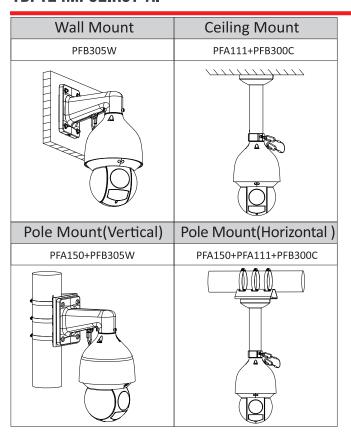

Dimensions (mm[inch])

